


ELECTRICAL CONDUIT AND WIRING ACCESSORIES



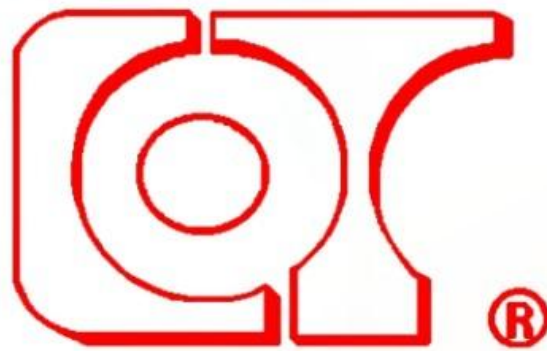

(C.O.T. Brand)

**Registered: China, Hong Kong, England, Singapore,
Malaysia, UAE, Saudi Arabia & Qatar(pending)**

Our company has been established since 1982. We have been the most leading and specialist manufacturer of electrical conduit fittings and accessories for over 30 years. Our business includes OEM, ODM and OBM.

We can follow details of drawings or samples to produce. Our customers include both local and overseas parties, ranging from Europe, Middle East to Africa and Southeast Asia. If you are interested, please do not hesitate to contact us.

Thread: METRIC, BS, PG, NPT, UNF and PF etc. (Option)

MANY FOLK ENTERPRISES LIMITED

**Address: Flat F, 13/F., Golden Plaza, 745-747 Nathan Road,
Kowloon, Hong Kong**

Tel : (852) 2381-4219

Fax : (852) 2397-0861

Website : <http://www.manyfolk.com>

E-mail : manyfolk@manyfolk.com



British Standard Steel Conduit



Class 4 Steel Conduit

Manufactured to BS 4568 Part 1:1970 Class 4 Heavy/
IEC 61386-1 & IEC 61386-21

Hot – Dipped Galv. Inside and Outside
20 – 32mm Thread to BS 4568
1 ½" – 2" Thread to BS 31

Item	Nominal Size	Outside Diameter (mm)		Wall Thickness	No. of length per bundle	Weights (kg/m)
		Min.	Max.			
COT-C20-S-HDG	20mm	19.7	20	1.6 ± 0.15	10 x 10	0.682
COT-C25-S-HDG	25mm	24.6	25	1.6 ± 0.15	10 x 10	0.86
COT-C32-S-HDG	32mm	31.6	32	1.6 ± 0.15	5 x 10	1.133
COT-C38-S-HDG	1 ½"	37.6	38	1.83 ± 0.15	4 x 6	1.63
COT-C50-S-HDG	2"	50.3	50.7	2.03 ± 0.15	4 x 6	2.36

- (20 - 32mm) Threaded both ends : one end fitted with coupling and the other protected by plastic end cap.
- (1 ½" - 2") Threaded both ends (with plastic end cap for protection of two ends).
- Standard length of 3.75m.
- Material: High quality steel ensuring smooth & easy bending.




Electrical Conduit Fittings and Accessories

20mm Circular Besa Box Series

20mm 鉛水司令箱系列

Material : Malleable Iron with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, IEC 60670-21,
BS 4568 Part II

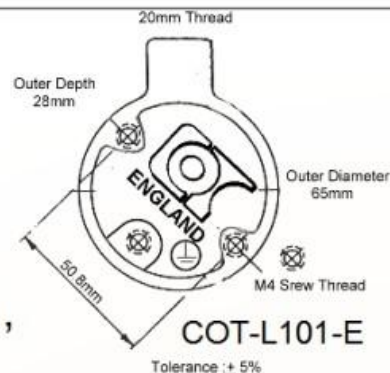

	Item	Description	Packing
	COT-L101-E	20mm Terminal 單咀	100 Pcs/ Ctn
	COT-L102-E	20mm Angle 曲咀	100 Pcs/ Ctn
	COT-L103-E	20mm Through 直咀	100 Pcs/ Ctn
	COT-L104-E	20mm Tee 三咀	100 Pcs/ Ctn
	COT-L105-E	20mm Intersection 四咀	100 Pcs/ Ctn
	COT-L136-E	20mm U Shape U 型	100 Pcs/ Ctn
	COT-L137-E	20mm H Shape H 型	100 Pcs/ Ctn
	COT-L139-E	20mm Y Shape Y 型	100 Pcs/ Ctn
	COT-L110-E	20mm Looping-in Box (Option: Back Hole 1-4) 無咀	120 Pcs/ Ctn
	COT-L120-E	20mm Back Outlet 底咀	100 Pcs/ Ctn
	COT-L121-E	20mm Terminal w/Back Outlet 底咀加單咀	100 Pcs/ Ctn
	COT-L122-E	20mm Angle w/Back Outlet 底咀加曲咀	100 Pcs/ Ctn
	COT-L123-E	20mm Through w/Back Outlet 底咀加直咀	100 Pcs/ Ctn
	COT-L124-E	20mm Tee w/Back Outlet 底咀加三咀	100 Pcs/ Ctn
	COT-L125-E	20mm Intersection w/Back Outlet 底咀加四咀	100 Pcs/ Ctn
	COT-L126-E	20mm U Shape w/Back Outlet 底咀加 U 型	100 Pcs/ Ctn
	COT-L127-E	20mm H Shape w/Back Outlet 底咀加 H 型	100 Pcs/ Ctn
	COT-L129-E	20mm Y Shape w/Back Outlet 底咀加 Y 型	100 Pcs/ Ctn
	COT-L151-E	20mm Terminal w/Extension Pattern & 25mm Back Hole 底有 25mm 圓孔及長孔加單咀	100 Pcs/ Ctn
	COT-L152-E	20mm Angle w/Extension Pattern & 25mm Back Hole 底有 25mm 圓孔及長孔加曲咀	100 Pcs/ Ctn
	COT-L153-E	20mm Through w/Extension Pattern & 25mm Back Hole 底有 25mm 圓孔及長孔加直咀	100 Pcs/ Ctn
	COT-L154-E	20mm Tee w/Extension Pattern & 25mm Back Hole 底有 25mm 圓孔及長孔加三咀	100 Pcs/ Ctn
	COT-L155-E	20mm Intersection w/Extension Pattern & 25mm Back Hole 底有 25mm 圓孔及長孔加四咀	100 Pcs/ Ctn




Electrical Conduit Fittings and Accessories

25mm Circular Besa Box Series

25mm 鉛水司令箱系列

Material : Malleable Iron with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, IEC 60670-21,
BS 4568 Part II

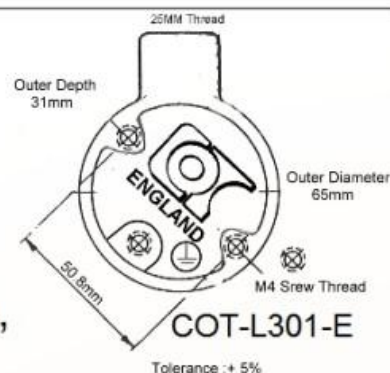


COT-L301-E



COT-L324-E



COT-L353-E



Item	Description	Packing
COT-L301-E	25mm Terminal 單咀	100 Pcs/ Ctn
COT-L302-E	25mm Angle 曲咀	100 Pcs/ Ctn
COT-L303-E	25mm Through 直咀	100 Pcs/ Ctn
COT-L304-E	25mm Tee 三咀	100 Pcs/ Ctn
COT-L305-E	25mm Intersection 四咀	100 Pcs/ Ctn
COT-L336-E	25mm U Shape U 型	100 Pcs/ Ctn
COT-L337-E	25mm H Shape H 型	100 Pcs/ Ctn
COT-L339-E	25mm Y Shape Y 型	100 Pcs/ Ctn
COT-L320-E	25mm Back Outlet 底咀	100 Pcs/ Ctn
COT-L321-E	25mm Terminal w/Back Outlet 底咀加單咀	100 Pcs/ Ctn
COT-L322-E	25mm Angle w/Back Outlet 底咀加曲咀	100 Pcs/ Ctn
COT-L323-E	25mm Through w/Back Outlet 底咀加直咀	100 Pcs/ Ctn
COT-L324-E	25mm Tee w/Back Outlet 底咀加三咀	100 Pcs/ Ctn
COT-L325-E	25mm Intersection w/Back Outlet 底咀加四咀	100 Pcs/ Ctn
COT-L326-E	25mm U Shape w/Back Outlet 底咀加 U 型	100 Pcs/ Ctn
COT-L327-E	25mm H Shape w/Back Outlet 底咀加 H 型	100 Pcs/ Ctn
COT-L329-E	25mm Y Shape w/Back Outlet 底咀加 Y 型	100 Pcs/ Ctn
COT-L351-E	25mm Terminal w/Extension Pattern & 25mm Back Hole 底有 25mm 圓孔及長孔加單咀	100 Pcs/ Ctn
COT-L352-E	25mm Angle w/Extension Pattern & 25mm Back Hole 底有 25mm 圓孔及長孔加曲咀	100 Pcs/ Ctn
COT-L353-E	25mm Through w/Extension Pattern & 25mm Back Hole 底有 25mm 圓孔及長孔加直咀	100 Pcs/ Ctn
COT-L354-E	25mm Tee w/Extension Pattern & 25mm Back Hole 底有 25mm 圓孔及長孔加三咀	100 Pcs/ Ctn
COT-L355-E	25mm Intersection w/Extension Pattern & 25mm Back Hole 底有 25mm 圓孔及長孔加四咀	100 Pcs/ Ctn




Electrical Conduit Fittings and Accessories

32mm Circular Besa Box Series

32mm 鉛水司令箱系列

Material : Malleable Iron with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, IEC 60670-21,
BS 4568 Part II

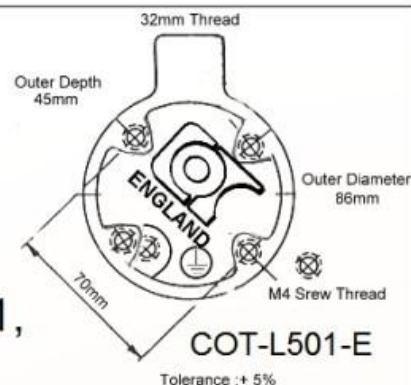

COT-L501-E



COT-L521-E




Item	Description	Packing
COT-L501-E	32mm Terminal 單咀	50 Pcs/ Ctn
COT-L502-E	32mm Angle 曲咀	50 Pcs/ Ctn
COT-L503-E	32mm Through 直咀	50 Pcs/ Ctn
COT-L504-E	32mm Tee 三咀	50 Pcs/ Ctn
COT-L505-E	32mm Intersection 四咀	50 Pcs/ Ctn
COT-L536-E	32mm U Shape U 型	50 Pcs/ Ctn
COT-L537-E	32mm H Shape H 型	50 Pcs/ Ctn
COT-L539-E	32mm Y Shape Y 型	50 Pcs/ Ctn
COT-L520-E	32mm Back Outlet 底咀	50 Pcs/ Ctn
COT-L521-E	32mm Terminal w/Back Outlet 底咀加單咀	50 Pcs/ Ctn
COT-L522-E	32mm Angle w/Back Outlet 底咀加曲咀	50 Pcs/ Ctn
COT-L523-E	32mm Through w/Back Outlet 底咀加直咀	50 Pcs/ Ctn
COT-L524-E	32mm Tee w/Back Outlet 底咀加三咀	50 Pcs/ Ctn
COT-L525-E	32mm Intersection w/Back Outlet 底咀加四咀	50 Pcs/ Ctn

Extension Ring – For Circular Besa Box Series

鉛水司令箱加高圈系列

Material : Malleable Iron with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, IEC 60670-21,
BS 4568 Part II

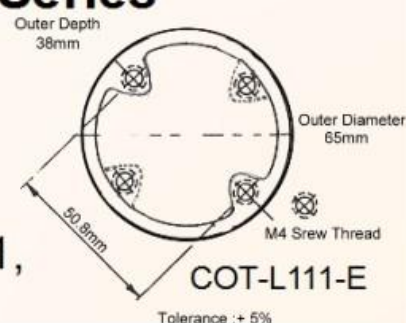

COT-L111-E

Item	Description	Packing
COT-L111-E	For 20 / 25mm Circular Box (38mm High)	120 Pcs/ Ctn
COT-L112-E	For 32mm Circular Box (38mm High)	80 Pcs/ Ctn




Electrical Conduit Fittings and Accessories

20mm Special Deep Circular Besa Box Series

20mm 高身鉛水司令箱系列

Material : Malleable Iron with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, IEC 60670-21,
BS 4568 Part II

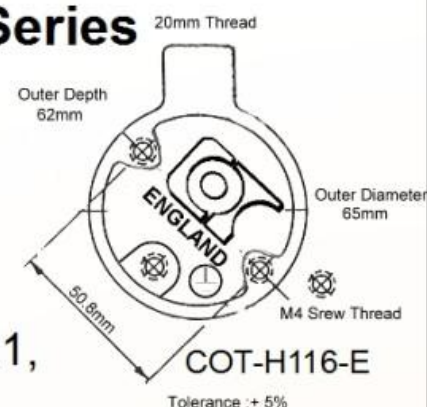

COT-H120-E





Item	Description	Packing
COT-H116-E	20mm Terminal 單咀	50 Pcs/ Ctn
COT-H117-E	20mm Angle 曲咀	50 Pcs/ Ctn
COT-H118-E	20mm Through 直咀	50 Pcs/ Ctn
COT-H119-E	20mm Tee 三咀	50 Pcs/ Ctn
COT-H120-E	20mm Intersection 四咀	50 Pcs/ Ctn

Adaptable Junction Box Series

鉛水過路箱系列

Material : Cast Iron with
Hot-Dipped Galv. Finish
(Option : with Steel Screw, without Screw,
with Brass Terminal)

Manufacture / Standard: IEC 60670-1, BS 4568 Part II

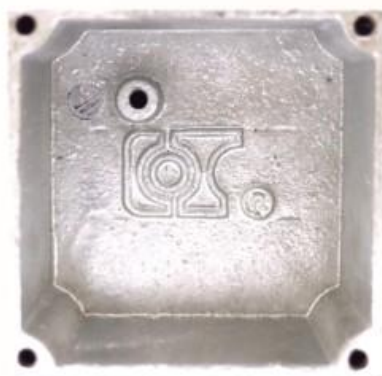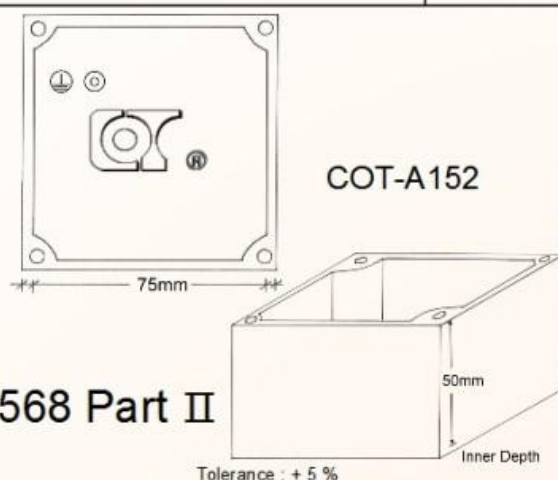

COT-A152

Item	Description	Packing
COT-A152	75 x 75 x 50mm (Inner Dimensions)	50 Pcs/ Ctn
COT-A375	75 x 75 x 75mm (Inner Dimensions)	30 Pcs/ Ctn
COT-A153	100 x 100 x 50mm (Inner Dimensions)	40 Pcs/ Ctn
COT-A475	100 x 100 x 75mm (Inner Dimensions)	20 Pcs/ Ctn
COT-A154	150 x 150 x 75mm (Inner Dimensions)	10 Pcs/ Ctn
COT-A155	225 x 225 x 75mm (Inner Dimensions)	5 Pcs/ Ctn
COT-A156	300 x 300 x 75mm (Inner Dimensions)	5 Pcs/ Ctn




Electrical Conduit Fittings and Accessories

Surface Switch Box and Bevel Surface Switch Box Series

鉛水明掣箱及鉛水斜口明掣箱系列

Material : Cast Iron with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, BS 4568 Part II

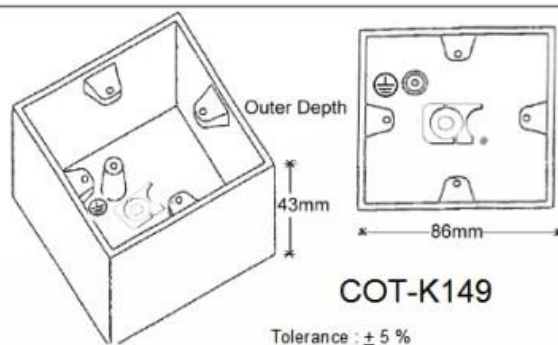

		Item	Description	Packing
 COT-K149	 COT-K151	COT-K149	Surface Switch Box (明掣箱) 86 x 86 x 43mm (Single) 單位	50 Pcs/Ctn
		COT-K151	146 x 86 x 43mm (Twin) 孖位	40 Pcs/Ctn
 COT-K150	 COT-K152	COT-K150	Bevel Surface Box (斜口明掣箱) 86 x 86 x 56 / 27mm (Single) 單位	50 Pcs/Ctn
		COT-K152	146 x 86 x 56 / 27mm (Twin) 孖位	40 Pcs/Ctn

Cable Entry Box

鉛水鐵皮總掣箱

Material : Steel Plate with
Hot-Dipped Galv. Finish

Manufacture / Standard: BS 4568 Part II

		Item	Description	Packing
		COT-K175	75 x 150 x 225mm	20 Pcs/Ctn
			or 60 x 150 x 225mm	




Electrical Conduit Fittings and Accessories

Switch and Socket Knock-Out Box with Brass Terminal Series

4662 鉛水鐵皮箱連水線座系列

Material : Steel Plate with
Hot-Dipped Galv. Finish
Manufacture / Standard: IEC 60670-1,
BS 4662

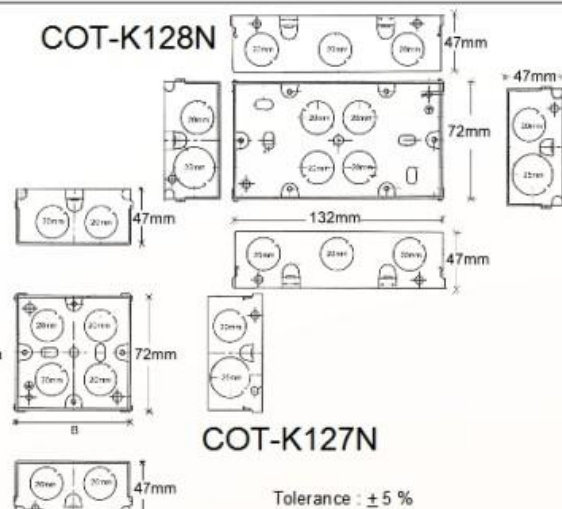

COT-K127N




COT-K128N

Item	Description	Packing
COT-K126N	72 X 72 X 35mm (Single) with Brass Terminal 銅水線柱	200 Pcs/Ctn
COT-K130N	132 X 72 X 35mm (Twin) with Brass Terminal 銅水線柱	100 Pcs/Ctn
COT-K127N	72 X 72 X 47mm (Single) with Brass Terminal 銅水線柱	200 Pcs/Ctn
COT-K128N	132 X 72 X 47mm (Twin) with Brass Terminal 銅水線柱	100 Pcs/Ctn

Extension Box for Switch and Socket Knock-Out Box Series

4662 鉛水鐵皮加高箱 / 框系列

Material : Steel Plate with
Hot-Dipped Galv. Finish
Manufacture / Standard: IEC 60670-1, BS 4662



COT-K133

Tolerance : $\pm 5\%$

Item	Description	Packing
For BS4662 Box Use 單位箱用		
COT-K133	20mm (High)	200 Pcs/Ctn
COT-K135	25mm (High)	200 Pcs/Ctn
COT-K136	35mm (High)	200 Pcs/Ctn
For BS4662 Twin Box Use 孖位箱用		
COT-K137	20mm (High)	100 Pcs/Ctn
COT-K137-25	25mm (High)	100 Pcs/Ctn
COT-K138	35mm (High)	100 Pcs/Ctn
COT-K139	47mm (High)	100 Pcs/Ctn



COT-K133



COT-K137




Electrical Conduit Fittings and Accessories

Extension Box (Internal Fixing Holes) For Adaptable Junction Box Series

鉛水過路箱加高通底箱 / 框系列

Material : Cast Iron with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, BS 4568 Part II

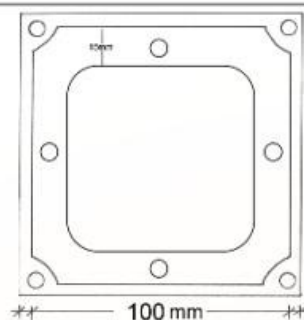

COT-D153
Tolerance : $\pm 5\%$



COT-D153

Item	Description	Packing
COT-D153	100 x 100 x 50mm	40 Pcs/Ctn
COT-D154	150 x 150 x 75mm	10 Pcs/Ctn
COT-D155	225 x 225 x 75mm	5 Pcs/Ctn
COT-D156	300 x 300 x 75mm	5 Pcs/Ctn


Extension Box (External Fixing Holes) For Adaptable Junction Box Series

鉛水過路箱加高通底箱 / 框系列 (有四耳)


Material : Cast Iron with
Hot-Dipped Galv. Finish

Option: with Brass Terminal

Manufacture / Standard: IEC 60670-1, BS 4568 Part II

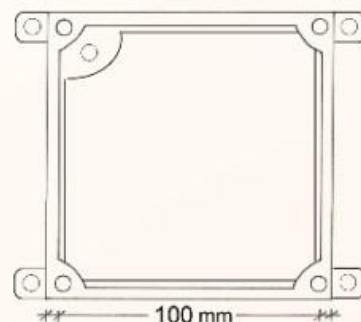

COT-D153-4E
Tolerance : $\pm 5\%$

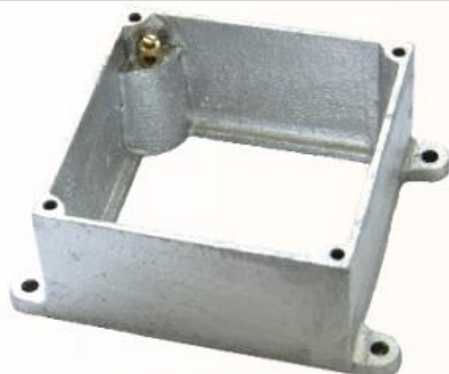

COT-D153-4E

Item	Description	Packing
COT-D152-4E	75 x 75 x 50mm	50 Pcs/Ctn
COT-D153-4E	100 x 100 x 50mm	40 Pcs/Ctn
COT-D154-4ES	150 x 150 x 50mm	10 Pcs/Ctn
COT-D154-4E	150 x 150 x 75mm	10 Pcs/Ctn
COT-D155-4E	225 x 225 x 75mm	5 Pcs/Ctn




Electrical Conduit Fittings and Accessories

Circular Box Cover

圓司令箱蓋系列

Material : Pre Hot-Dipped Galv.
or Steel Plate with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1,
IEC 60670-21, BS 4568 Part II

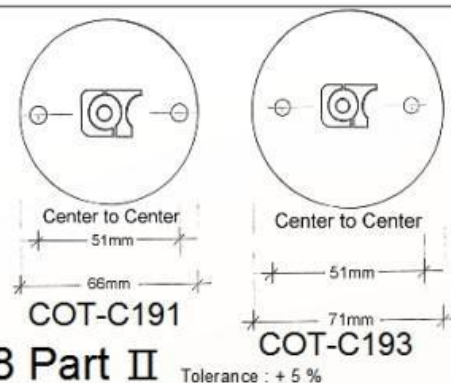

COT-C191


Item	Description	Packing
COT-C191	Surface Type (Pre Hot-Dipped Galv.) 熱浸鋅板明蓋 For 20 / 25mm Circular Box Use (Dia. 66mm)	1,000 Pcs/ Ctn
COT-C192	For 20 / 25mm Circular Box Use w/20mm hole (Dia. 66mm)	1,000 Pcs/ Ctn
COT-C199	For 32mm Circular Box Use (Dia. 86mm)	500 Pcs/ Ctn
COT-C291	Surface Type (Hot-Dipped Galv.) 鐵板熱浸鋅明蓋 For 20 / 25mm Circular Box Use (Dia. 66mm)	1,000 Pcs/ Ctn
COT-C292	For 20 / 25mm Circular Box Use w/20mm hole (Dia. 66mm)	1,000 Pcs/ Ctn
COT-C193	Flush Type (Pre Hot-Dipped Galv.) 熱浸鋅板暗蓋 For 20 / 25mm Circular Box Use (Dia. 71mm)	1,000 Pcs/ Ctn
COT-C194	For 20 / 25mm Circular Box Use w/20mm hole (Dia. 71mm)	1,000 Pcs/ Ctn
COT-C293	Flush Type (Hot-Dipped Galv.) 鐵板熱浸鋅暗蓋 For 20 / 25mm Circular Box Use (Dia. 71mm)	600 Pcs/ Ctn
COT-C294	For 20 / 25mm Circular Box Use w/20mm hole (Dia. 71mm)	600 Pcs/ Ctn

Switch & Socket Box Cover

4662 鉛水箱蓋系列

Material : Pre Hot-Dipped Galv.
or Steel Plate with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, BS 4662

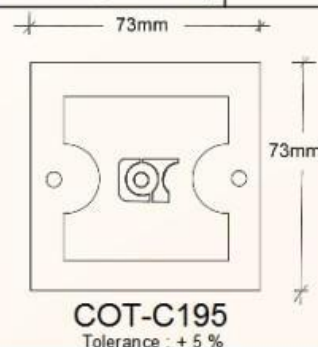

COT-C195
Tolerance : ± 5 %



COT-C195

Item	Description	Packing
COT-C195	Surface Type (Pre Hot-Dipped Galv.) 熱浸鋅板明蓋 73 x 73mm	600 Pcs/ Ctn
COT-C196	73 x 73mm w/20mm hole	600 Pcs/ Ctn
COT-C295	Surface Type (Hot-Dipped Galv.) 鐵板熱浸鋅明蓋 73 x 73mm	600 Pcs/ Ctn
COT-C296	73 x 73mm w/20mm hole	600 Pcs/ Ctn
COT-C197	Flush Type (Pre Hot-Dipped Galv.) 熱浸鋅板暗蓋 102 x 102mm	400 Pcs/ Ctn
COT-C198	102 x 102mm w/20mm hole	400 Pcs/ Ctn
COT-C297	Flush Type (Hot-Dipped Galv.) 鐵板熱浸鋅暗蓋 102 x 102mm	400 Pcs/ Ctn
COT-C298	102 x 102mm w/20mm hole	400 Pcs/ Ctn




Electrical Conduit Fittings and Accessories

Surface Switch Box Cover Series

鉛水明掣箱蓋系列

Material : Pre-Galv. Steel Plate or Steel Plate
with Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, BS 4568 Part II

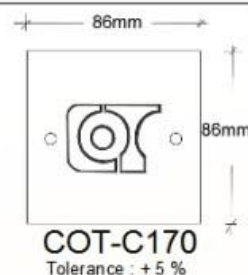

COT-C170



Item	Description	Packing
COT-C170	Surface Type (Pre Hot-Dipped Galv.) 熱浸鋅板明蓋 86 x 86mm	400 Pcs/ Ctn
COT-C171	146 x 86mm	200 Pcs/ Ctn
COT-C270	Surface Type (Hot-Dipped Galv.) 鐵板熱浸鋅明蓋 86 x 86mm	400 Pcs/ Ctn
COT-C271	146 x 86mm	200 Pcs/ Ctn

Adaptable Junction Box Cover Series

過路箱蓋系列

Material : Pre-Galv. Steel Plate or
Steel Plate with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, BS 4568 Part II

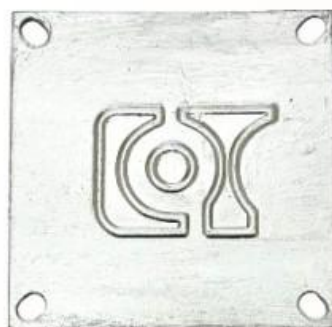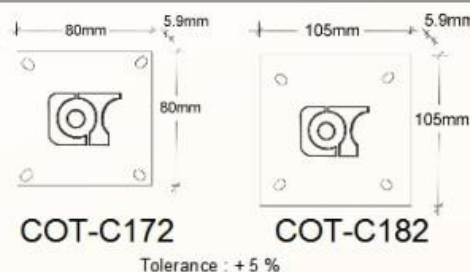

COT-C272



COT-C182

Item	Description	Packing
COT-C172	Surface Type (Pre Hot-Dipped Galv.) 熱浸鋅板明蓋 For 75mm Adaptable Box Use (80 x 80mm)	400 Pcs/ Ctn
COT-C173	For 100mm Adaptable Box Use (105 x 105mm)	200 Pcs/ Ctn
COT-C174	For 150mm Adaptable Box Use (155 x 155mm)	100 Pcs/ Ctn
COT-C175	For 225mm Adaptable Box Use (230 x 230mm)	40 Pcs/ Ctn
COT-C176	For 300mm Adaptable Box Use (305 x 305mm)	20 Pcs/ Ctn
COT-C272	Surface Type (Hot-Dipped Galv.) 鐵板熱浸鋅明蓋 For 75mm Adaptable Box Use (80 x 80mm)	400 Pcs/ Ctn
COT-C273	For 100mm Adaptable Box Use (105 x 105mm)	200 Pcs/ Ctn
COT-C274	For 150mm Adaptable Box Use (155 x 155mm)	100 Pcs/ Ctn
COT-C275	For 225mm Adaptable Box Use (230 x 230mm)	40 Pcs/ Ctn
COT-C276	For 300mm Adaptable Box Use (305 x 305mm)	20 Pcs/ Ctn
COT-C182	Flush Type (Pre Hot-Dipped Galv.) 熱浸鋅板暗蓋 For 75mm Adaptable Box Use (106 x 106mm)	200 Pcs/ Ctn
COT-C183	For 100mm Adaptable Box Use (130 x 130mm)	200 Pcs/ Ctn
COT-C184	For 150mm Adaptable Box Use (180 x 180mm)	100 Pcs/ Ctn
COT-C185	For 225mm Adaptable Box Use (256x 256mm)	40 Pcs/ Ctn
COT-C186	For 300mm Adaptable Box Use (328 x 328mm)	20 Pcs/ Ctn
COT-C282	Flush Type (Hot-Dipped Galv.) 鐵板熱浸鋅暗蓋 For 75mm Adaptable Box Use (106 x 106mm)	200 Pcs/ Ctn
COT-C283	For 100mm Adaptable Box Use (130 x 130mm)	200 Pcs/ Ctn
COT-C284	For 150mm Adaptable Box Use (180 x 180mm)	100 Pcs/ Ctn
COT-C285	For 225mm Adaptable Box Use (256x 256mm)	50 Pcs/ Ctn
COT-C286	For 300mm Adaptable Box Use (328 x 328mm)	25 Pcs/ Ctn




Rubber Gasket Series

橡膠密封墊片 / 燕梳臣系列

Material : Rubber

(Option: Low Smoke, Fire Retardant and Halogen Free)

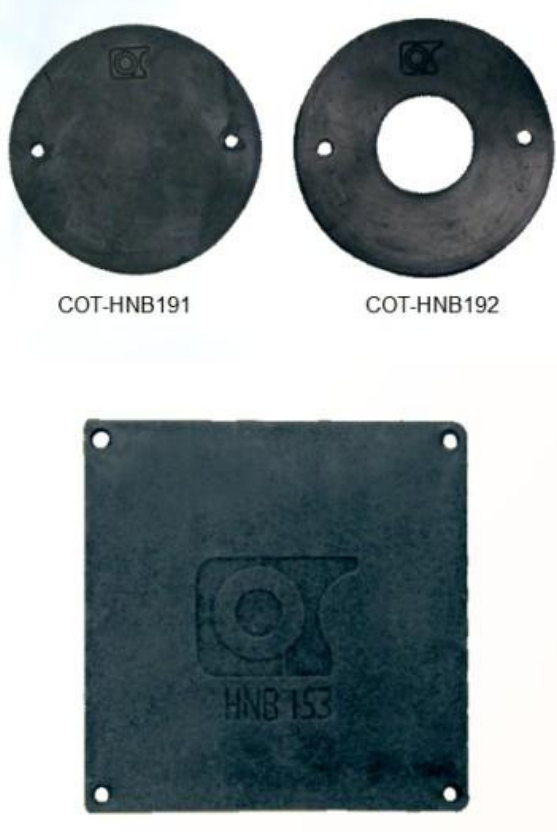	Item	Description	Packing
		For Circular Box 司令箱用	
COT-HNB191	COT-HNB191	For 20 / 25mm Circular Box use	2,000 Pcs /Ctn
COT-HNB192	COT-HNB192	For 20 / 25mm Circular Box use w/25mm hole	2,000 Pcs /Ctn
	COT-HNB199	For 32mm Circular Box use	500 Pcs /Ctn
		For Adaptable Box 過路箱用	
	COT-HNB152	For 75mm Adaptable Box use	1,000 Pcs /Ctn
	COT-HNB153	For 100mm Adaptable Box use	500 Pcs /Ctn
	COT-HNB154	For 150mm Adaptable Box use	200 Pcs /Ctn
	COT-HNB155	For 225mm Adaptable Box use	100 Pcs /Ctn
	COT-HNB156	For 300mm Adaptable Box use	50 Pcs /Ctn

Rubber Grommet Series

(Centre Diaphragm)

橡膠圈系列

Material : Rubber

	Item	Description	Packing
	COT-BLS20	20mm	5,000 Pcs /Ctn
	COT-BLS25	25mm	2,000 Pcs /Ctn
	COT-BLS32	32mm	2,000 Pcs /Ctn
	COT-BLS38	38mm	500 Pcs /Ctn
	COT-BLS50	50mm	500 Pcs /Ctn



Electrical Conduit Fittings and Accessories

Solid Coupler Series


鉛水燈喉梳杰 / 管接系列

Material : Steel with
Hot-Dipped Galv. Finish

Option : Imperial Thread

Manufacture / Standard: IEC 61386-1,

IEC 61386-21, BS 4568 Part II

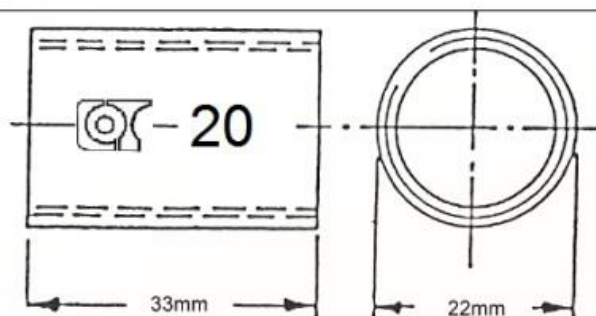

COT-C140
Tolerance : $\pm 5\%$



COT-C141

Item	Description	Packing
COT-C140	20mm	1,000 Pcs/Ctn
COT-C141	25mm	500 Pcs/Ctn
COT-C142	32mm	400 Pcs/Ctn
COT-C143	1 1/2"	300 Pcs/Ctn
COT-C144	2"	100 Pcs/Ctn

Flange Coupling with Lead Washer and Brass Long Male Bush Series

鉛水有邊梳杰連鉛墊片及
銅長杯臣三件套裝系列

Material : Malleable Iron with Hot-Dipped
Galv. Finish, Lead and Brass



COT-C220

Item	Description	Packing
COT-C220	20mm	200 Sets/Ctn
COT-C225	25mm	200 Sets/Ctn
COT-C232	32mm	100 Sets/Ctn
COT-C238	1 1/2"	100 Sets/Ctn
COT-C250	2"	50 Sets/Ctn

Crampet Series

鉛水入牆鉤碼系列

Material : Steel Plate with
Hot-Dipped Galv. Finish

Option : Stainless Steel



Item	Description	Packing
COT-SR16	16mm	5,000 Pcs/Ctn
COT-SR20	20mm	4,000 Pcs/Ctn
COT-SR25	25mm	3,000 Pcs/Ctn
COT-SR32	32mm	2,000 Pcs/Ctn



Electrical Conduit Fittings and Accessories


Heavy Distance Saddle Series

鉛水離牆碼系列

Material : Malleable Iron with
Hot-Dipped Galv. Finish

Option : Brass Screw

Manufacture / Standard: IEC 61386-1,
IEC 61386-21, BS 4568 Part II

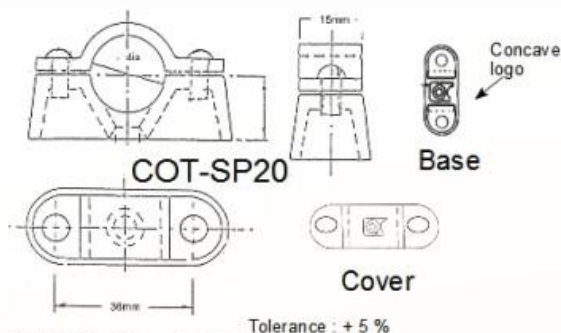

COT-SP20

Item	Description	Packing
COT-SP20	20mm	500 Pcs/ Ctn
COT-SP25	25mm	300 Pcs/ Ctn
COT-SP32	32mm	200 Pcs/ Ctn
COT-SP38	1 1/2"	160 Pcs/ Ctn
COT-SP50	2"	100 Pcs/ Ctn

Spacer Bar Saddle, Plain Saddle and Half Saddle Electro-Galv. Series

鐵皮碼系列

Material : Steel Plate

Option : Hot-Dipped Galv. or Stainless Steel



COT-SPS20



COT-SPO20



COT-SPH20

Item	Description	Packing
Spacer Bar Saddle 薄底碼		
COT-SPS20	20mm	1,000 Pcs/ Ctn
COT-SPS25	25mm	1,000 Pcs/ Ctn
COT-SPS32	32mm	500 Pcs/ Ctn
COT-SPS38	1 1/2"	400 Pcs/ Ctn
COT-SPS50	2"	200 Pcs/ Ctn
Plain Saddle 無底碼		
COT-SPO20	20mm	2,000 Pcs/ Ctn
COT-SPO25	25mm	1,500 Pcs/ Ctn
COT-SPO32	32mm	1,000 Pcs/ Ctn
Half Saddle 無底半圓碼		
COT-SPH20	20mm	2,000 Pcs/ Ctn
COT-SPH25	25mm	1,500 Pcs/ Ctn
COT-SPH32	32mm	1,000 Pcs/ Ctn




Electrical Conduit Fittings and Accessories

Dome Cover Series

鉛水法蘭系列

Material : Steel / Malleable Iron with Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 60670-1, IEC 60670-21, BS 4568 Part II Tolerance : $\pm 5\%$

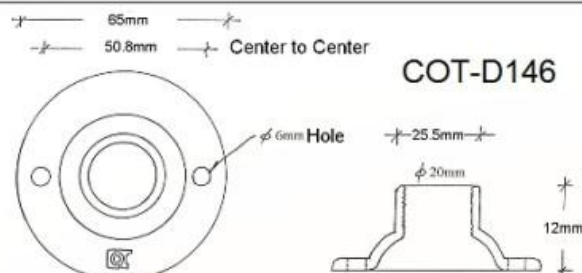

COT-D146


	Item	Description	Packing
   COT-D142 COT-D146 COT-D145	COT-D142	Hook (Male) 法蘭吊鉤 20mm	300 Pcs/ Ctn
  COT-D145 COT-D146	COT-D145 COT-D146	Dome Cover 法蘭 25mm 20mm	300 Pcs/ Ctn 300 Pcs/ Ctn
  COT-D147 COT-D148	COT-D147	Break Joint-Ring 法蘭圈 For 20 / 25mm Dome Cover	200 Pcs/ Ctn
 COT-D148	COT-D148	Dome Cover with Hook 帶鉤法蘭 For 20 / 25mm Circular Box	300 Pcs/ Ctn
 COT-D149	COT-D149	Cover, Ball & Socket Earthed 活動法蘭 20mm	200 Pcs/ Ctn
 COT-D150	COT-D150	25mm	200 Pcs/ Ctn

Hexagonal Locknut Series

鉛水六角迫母系列

Material : Steel / Malleable Iron with Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 61386-1, IEC 61386-21, BS 4568 Part II Tolerance : $\pm 5\%$

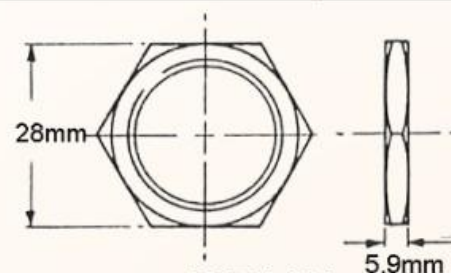

COT-L184

	Item	Description	Packing
  COT-L181-183 COT-L184-186	COT-L181 COT-L182 COT-L183 COT-L184 COT-L185 COT-L186 COT-L187 COT-L188	20 x 3mm 25 x 3mm 32 x 3mm 20 x 6mm 25 x 6mm 32 x 6mm 1 1/2" x 3mm 2" x 3mm	3,000 Pcs/ Ctn 2,000 Pcs/ Ctn 1,000 Pcs/ Ctn 2,000 Pcs/ Ctn 1,000 Pcs/ Ctn 1,000 Pcs/ Ctn 500 Pcs/ Ctn 500 Pcs/ Ctn



Inspection Elbow, Bend and Tee Series

鉛水有檢查孔曲 / 彎 / 三叉系列

Material : Malleable Iron with Hot-Dipped Galv. Finish

Steel Plate Cover : Pre Hot-Dipped Galv.

Manufacture / Standard: IEC 61386-1, BS 4568 Part II

	Item	Description	Packing
 COT-C201	COT-C201	Inspection Elbow 有檢查孔曲 20mm	100 Pcs/ Ctn
	COT-C251	25mm	100 Pcs/ Ctn
	COT-C321	32mm	100 Pcs/ Ctn
	COT-C381	1 1/2"	100 Pcs/ Ctn
	COT-C501	2"	50 Pcs/ Ctn
 COT-C202	COT-C202	Inspection Bend 有檢查孔彎 20mm	100 Pcs/ Ctn
	COT-C252	25mm	100 Pcs/ Ctn
	COT-C322	32mm	100 Pcs/ Ctn
	COT-C382	1 1/2"	100 Pcs/ Ctn
	COT-C502	2"	50 Pcs/ Ctn
 COT-C203	COT-C203	Inspection Tee 有檢查孔三叉 20mm	100 Pcs/ Ctn
	COT-C253	25mm	100 Pcs/ Ctn
	COT-C323	32mm	100 Pcs/ Ctn
	COT-C383	1 1/2"	100 Pcs/ Ctn
	COT-C503	2"	50 Pcs/ Ctn

90° Normal Bend with Internal Thread Series

90 度內牙鉛水邊喉系列

Material : Steel Plate with
Hot-Dipped Galv. Finish

Manufacture / Standard: IEC 61386-1, BS 4568 Part II

	Item	Description	Packing
 COT-C204-504	COT-C204	20mm	100 Pcs/ Ctn
	COT-C254	25mm	60 Pcs/ Ctn
	COT-C324	32mm	50 Pcs/ Ctn
	COT-C384	1 1/2"	30 Pcs/ Ctn
	COT-C504	2"	20 Pcs/ Ctn




Electrical Conduit Fittings and Accessories

Brass Long Male Bush Series

長咀銅杯臣系列

Material : Brass

Manufacture / Standard: IEC 61386-1,
IEC 61386-21, BS 4568 Part II

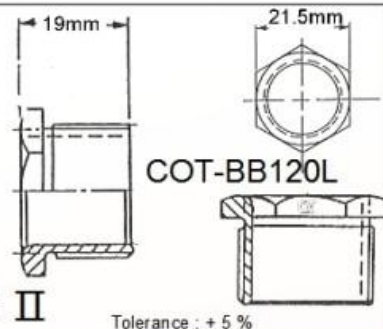


 COT-BB120L	Item	Description	Packing
	COT-BB120L	20mm	2,000 Pcs/ Ctn
	COT-BB125L	25mm	1,000 Pcs/ Ctn
	COT-BB132L	32mm	500 Pcs/ Ctn
	COT-BB138L	1 ½ "	300 Pcs/ Ctn
	COT-BB150L	2"	200 Pcs/ Ctn

Brass Short Male Bush Series

短咀銅杯臣系列

Material : Brass

Manufacture / Standard: IEC 61386-1,
IEC 61386-21, BS 4568 Part II

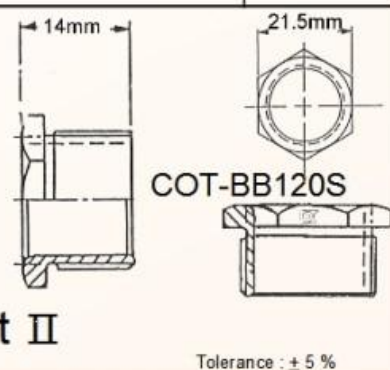

 COT-BB120S	Item	Description	Packing
	COT-BB120S	20mm	2,000 Pcs/ Ctn
	COT-BB125S	25mm	1,000 Pcs/ Ctn
	COT-BB132S	32mm	1,000 Pcs/ Ctn
	COT-BB138S	1 ½ "	500 Pcs/ Ctn
	COT-BB150S	2"	300 Pcs/ Ctn



Brass Female Bush Series

銅包臣系列

Material : Brass

Manufacture / Standard : IEC 61386-1,
BS 4568 Part II

 COT-B272	Item	Description	Packing
	COT-B272	20mm	4,000 Pcs/ Ctn
	COT-B273	25mm	3,000 Pcs/ Ctn
	COT-B274	32mm	2,000 Pcs/ Ctn
	COT-B275UK	1 1/2 "	1,000 Pcs/ Ctn
	COT-B276UK	2"	500 Pcs/ Ctn

Brass Reducer – Hexagonal Head Series

銅刁士 / 銅轉換接頭系列

Material : Brass

Manufacture / Standard : IEC 61386-1,
BS 4568 Part II

 COT-B401	Item	Description	Packing
	COT-B401	20 x 25mm	1,000 Pcs/ Ctn
	COT-B402	25 x 32mm	500 Pcs/ Ctn
	COT-B403	20 x 32mm	500 Pcs/ Ctn
	COT-B409	63 x 75mm	500 Pcs/ Ctn



Stopping Plug – Hexagonal Head Series

六角形銅塞系列

Material : Brass

Manufacture / Standard : IEC 61386-1, BS 4568 Part II

 COT-BS120S	Item	Description	Packing
	COT-BS120S	20mm	1,000 Pcs/ Ctn
	COT-BS125S	25mm	500 Pcs/ Ctn
	COT-BS132S	32mm	500 Pcs/ Ctn

Stopping Plug – Slotted Head Series

銅塞系列

Material : Brass

Manufacture / Standard : IEC 61386-1, BS 4568 Part II

	Item	Description	Packing
	COT-BS120R	20mm	1,000 Pcs/ Ctn
	COT-BS125R	25mm	500 Pcs/ Ctn
	COT-BS132R	32mm	500 Pcs/ Ctn

Stopping Plug – Brass Stud Series

圓頭有邊銅塞系列

Material : Brass

Manufacture / Standard : IEC 61386-1, BS 4568 Part II

 COT-BS141	Item	Description	Packing
	COT-BS141	20mm	1,000 Pcs/ Ctn
	COT-BS142	25mm	500 Pcs/ Ctn
	COT-BS143	32mm	500 Pcs/ Ctn
	COT-BS147	1"	500 Pcs/ Ctn



Brass Short Nipple Series

銅全外芽梳杰 / 管接系列

Material : Brass or Steel with Hot-Dipped Galv. Finish

Manufacture / Standard : IEC 61386-1

		Item	Description	Packing
	COT-BD2033	COT-BD2033	20mm (33mm Long) Brass	1,000 Pcs/ Ctn
	COT-BD2536	COT-BD2536	25mm (36mm Long) Brass	1,000 Pcs/ Ctn
	COT-BD2570	COT-BD2570	25mm (70mm Long) Brass	600 Pcs/ Ctn
	COT-BD2033S	COT-BD2033S	20mm (33mm Long) Steel	1,000 Pcs/ Ctn
	COT-BD2536S	COT-BD2536S	25mm (36mm Long) Steel	1,000 Pcs/ Ctn

Earth Terminal Series

接地用銅水線座 / 水線柱系列

Material : Brass

Manufacture / Standard : IEC 61386-1, IEC60670-1

		Item	Description	Packing
   	COT-BED01E	COT-BED01E	For 35mm BS 4662 Box	3,000 Pcs/ Ctn
	COT-BED02E	COT-BED02E	For 47mm BS 4662 Box	1,000 Pcs/ Ctn
	COT-BED02G	COT-BED02G	For Special Deep Circular Box	1,000 Pcs/ Ctn
	COT-BED04E	COT-BED04E	For Standard Circular Box	3,000 Pcs/ Ctn



Brass Round Locking Ring Series

銅圓迫母系列

Material : Brass

Manufacture / Standard : IEC 61386-1, BS 4568 Part II



Item	Description	Packing
COT-BLR20	20mm	5,000 Pcs/ Ctn
COT-BLR25	25mm	3,000 Pcs/ Ctn
COT-BLR32	32mm	3,000 Pcs/ Ctn

Brass Hexagonal Locknut Series

銅六角迫母系列

Material : Brass

Manufacture / Standard : IEC 61386-1, BS 4568 Part II



Item	Description	Packing
COT-BLN19	3/4"	3,000 Pcs/ Ctn
COT-BLN20	20mm	3,000 Pcs/ Ctn
COT-BLN25	25mm	2,000 Pcs/ Ctn
COT-BLN26	1"	2,000 Pcs/ Ctn
COT-BLN32	32mm	1,000 Pcs/ Ctn
COT-BLN38	1 1/2"	500 Pcs/ Ctn
COT-BLN40	40mm	500 Pcs/ Ctn
COT-BLN50	50mm	500 Pcs/ Ctn
COT-BLN51	2"	300 Pcs/ Ctn
COT-BLN63	63mm	300 Pcs/ Ctn
COT-BLN75	75mm	100 Pcs/ Ctn
COT-BLN88	88mm	100 Pcs/ Ctn
COT-BLN90	90mm	100 Pcs/ Ctn



Brass Hexagonal Locknut – Light Series (Commercial Type)

輕型銅六角迫母系列

Material : Brass

Manufacture / Standard : IEC 61386-1, BS 4568 Part II

	Item	Description	Packing
	COT-BLN19S	¾"	5,000 Pcs/ Ctn
	COT-BLN20S	20mm	3,000 Pcs/ Ctn
	COT-BLN25S	25mm	2,000 Pcs/ Ctn
	COT-BLN26S	1"	2,000 Pcs/ Ctn
	COT-BLN32S	32mm	1,000 Pcs/ Ctn
	COT-BLN38S	1 ½"	500 Pcs/ Ctn
	COT-BLN40S	40mm	500 Pcs/ Ctn
	COT-BLN50S	50mm	500 Pcs/ Ctn
	COT-BLN51S	2"	300 Pcs/ Ctn
	COT-BLN63S	63mm	300 Pcs/ Ctn
	COT-BLN75S	75mm	100 Pcs/ Ctn
	COT-BLN88S	88mm	100 Pcs/ Ctn
	COT-BLN90S	90mm	100 Pcs/ Ctn



Electrical Conduit Fittings and Accessories

Nickel Plated Two Part Adaptor Female Series

二件套裝鍍鎳銅索咀（內牙）系列

Material : Brass (BS 2874)

Manufacture / Standard: IEC 61386-1, IEC 61386-23, BS 731




 COT-B220NF	Item	Description	Packing
		Flexible Conduit's Inner Dia. X Thread	
	COT-B216NF	16 X 20mm	40 Sets / Box
	COT-B220NF	20 X 20mm	30 Sets / Box
	COT-B225NF	25 X 25mm	20 Sets / Box
	COT-B232NF	32 X 32mm	10 Sets / Box
	COT-B238NF	1 1/2" X 1 1/2"	5 Sets / Box
	COT-B250NF	2" X 2"	3 Sets / Box

Nickel Plated Two Part Adaptor Male Series

二件套裝鍍鎳銅索咀（外牙）系列

Material : Brass (BS 2874)

Manufacture / Standard: IEC 61386-1, IEC 61386-23, BS 731

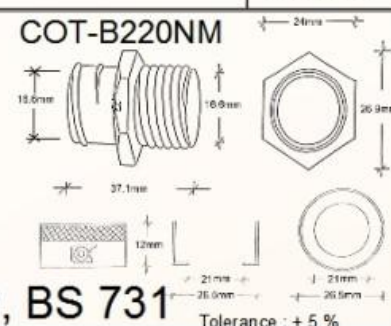

 COT-B220NM	Item	Description	Packing
		Flexible Conduit's Inner Dia. X Thread	
	COT-B216NM	16 X 20mm	40 Sets / Box
	COT-B220NM	20 X 20mm	30 Sets / Box
	COT-B225NM	25 X 25mm	20 Sets / Box
	COT-B232NM	32 X 32mm	10 Sets / Box
	COT-B238NM	1 1/2" X 1 1/2"	5 Sets / Box
	COT-B250NM	2" X 2"	3 Sets / Box

Nickel Plated Adaptor Series

二件套裝鍍鎳銅索咀系列

Material : Brass (BS 2874)

	Item	Description	Packing
	COT-B212MS	13mm	60 Sets / Box
	COT-B216MS	16mm	50 Sets / Box
	COT-B220MS	20mm	40 Sets / Box
	COT-B225MS	25mm	25 Sets / Box



Brass Adaptor Female Series

軟管銅接頭 / 銅索咀 (內牙) 系列

Material : Brass

Manufacture / Standard: IEC 61386-1, BS 731



COT-BB20F

Item	Description	Packing
	Flexible Conduit 's Inner Dia. X Thread	
COT-BB12F	13 X 20mm	1,000 Pcs / Ctn
COT-BB16F	16 X 20mm	1,000 Pcs / Ctn
COT-BB20F	20 X 20mm	1,000 Pcs / Ctn
COT-BB25F	25 X 25mm	400 Pcs / Ctn
COT-BB32F	32 X 32mm	200 Pcs / Ctn
COT-BB38F	1 1/2" X 1 1/2"	160 Pcs / Ctn
COT-BB50F	2" X 2"	80 Pcs / Ctn

Brass Adaptor Male Series

軟管銅接頭 / 銅索咀 (外牙) 系列

Material : Brass

Manufacture / Standard: IEC 61386-1, BS 731



COT-BB20M

Item	Description	Packing
	Flexible Conduit 's Inner Dia. X Thread	
COT-BB12M	13 X 20mm	1,000 Pcs / Ctn
COT-BB16M	16 X 20mm	1,000 Pcs / Ctn
COT-BB20M	20 X 20mm	1,000 Pcs / Ctn
COT-BB25M	25 X 25mm	400 Pcs / Ctn
COT-BB32M	32 X 32mm	200 Pcs / Ctn
COT-BB38M	1 1/2" X 1 1/2"	160 Pcs / Ctn
COT-BB50M	2" X 2"	80 Pcs / Ctn
COT-BC1219M	12mm X 3/4"	1,000 Pcs / Ctn
COT-BC1619M	16mm X 3/4"	1,000 Pcs / Ctn
COT-BC2019M	20mm X 3/4"	1,000 Pcs / Ctn
COT-BC2025M	20 X 25mm	400 Pcs / Ctn
COT-BC2026M	20mm X 1"	400 Pcs / Ctn
COT-BC2526M	25mm X 1"	400 Pcs / Ctn



Steel Flexible Conduit LSFH Coated and Adaptors

(Low Smoke, Fire Retardant and Halogen Free)



Item Code	Metal Tube (Bore) (approx.)			Std. Packing	Two Part Adaptor*		Thread	One Part Adaptor*		Two Part Adaptor*
	Inner Dia.	Outer Dia.			Male	Female		Male	Female	Plain Hole-no thread
COT-KSPS16-LSFH	5/8"	16mm	20.2mm	30M/Roll	COT-B216NM	COT-B216NF	20mm	COT-BB16M	COT-BB16F	COT-B216NPH
COT-KSPS20-LSFH	3/4"	20mm	23.0mm	30M/Roll	COT-B220NM	COT-B220NF	20mm	COT-BB20M	COT-BB20F	COT-B220NPH
COT-KSPS25-LSFH	1"	25mm	29.4mm	30M/Roll	COT-B225NM	COT-B225NF	25mm	COT-BB25M	COT-BB25F	COT-B225NPH
COT-KSPS32-LSFH	1 1/4"	32mm	36.5mm	15M/Roll	COT-B232NM	COT-B232NF	32mm	COT-BB32M	COT-BB32F	COT-B232NPH
COT-KSPS38-LSFH	1 1/2"	38mm	44.3mm	15M/Roll	COT-B238NM	COT-B238NF	1 1/2"	COT-BB38M	COT-BB38F	COT-B238NPH
COT-KSPS50-LSFH	2"	50mm	58.0mm	15M/Roll	COT-B250NM	COT-B250NF	2"	COT-BB50M	COT-BB50F	COT-B250NPH

Remark:

* All Adaptors are made of Brass (Option: Nickel Plated)



Steel Flexible Conduit LSFH Coated and Adaptors

(Low Smoke, Fire Retardant and Halogen Free)



KSPS-LSFH Series

Material:

- Pre Hot-Dipped Galv. (Hot-Dipped Galv. Steel Tape)
- LSFH Compounded Coated
- Highly Flexible
- Tensile Resistance
- Water Resistance



Square-locked structure
made by helically coiling
formed of steel strip
and LSFH coated



Remark:

* All Adaptors are made of Brass (Option: Nickel Plated)

Steel Flexible Conduits LSFH Coated are manufactured to IEC 60332-1-1, IEC 61034-2, IEC 60754-1, IEC 61386-23, BS 731 and BS EN 60529 IP54.

Two Part Adaptors are manufactured to IEC 61386-23, BS 731, BS EN 60529 IP 54 and Brass to BS 2874

For further information, please feel free to inquire.

Steel Flexible Conduit LSFH Coated

- 3/8" inner dia. (10mm)
- 1/2" inner dia. (12mm)
- 5/8" inner dia. (16mm)
- 3/4" inner dia. (20mm)
- 1" inner dia. (25mm)
- 1 1/4" inner dia. (32mm)
- 1 1/2" inner dia. (38mm)
- 2" inner dia. (50mm)
- 3" inner dia.
- 4" inner dia.

3/8", 1/2", 3", 4" size available by order

Brass Adaptor

Female / Male

- 13 X 20mm
- 16 X 20mm
- 20 X 20mm
- 25 X 25mm
- 32 X 32mm
- 1 1/2" X 1 1/2"
- 2" X 2"

Brass Adaptor

Male (w/screw/locknut)

- 12mm X 3/4"
- 16mm X 3/4"
- 20mm X 3/4"
- 20mm X 25mm
- 20mm X 1"
- 25mm X 1"

Two-Part Adaptor (Brass with Nickel Plated)

Female / Male

- 16 X 20mm
- 20 X 20mm
- 25 X 25mm
- 32 X 32mm
- 16mm X 3/4"
- 20mm X 3/4"
- 1 1/2" X 1 1/2"
- 2" X 2"
- 3" X 3"
- 4" X 4"

Brief Information of Standard:

- IEC 60332-1-1: Flame Propagation
- IEC 61034-2 : Smoke Emission
- IEC 60754-1 : Acid Gas Emission
- BS 2874 : Copper Content



Item Code				Metal Tube (Bore) (approx.)			Std.
With PVC Sheathing	Metal	Stainless Steel with PVC Sheathing	Stainless Steel	Inner Dia.		Outer Dia.	Packing
COT-KSPS10-BSH	COT-KSM10-BSH	COT-KSPS10S-304 / 316	COT-KSM10S-304 / 316	3/8"	10mm	12.5mm	30M/Roll
COT-KSPS12-BSH	COT-KSM12-BSH	COT-KSPS12S-304 / 316	COT-KSM12S-304 / 316	1/2"	12mm	16.2mm	30M/Roll
COT-KSPS16-BSH	COT-KSM16-BSH	COT-KSPS16S-304 / 316	COT-KSM16S-304 / 316	5/8"	16mm	20.2mm	30M/Roll
COT-KSPS20-BSH	COT-KSM19-BSH	COT-KSPS20S-304 / 316	COT-KSM19S-304 / 316	3/4"	20mm	23.0mm	30M/Roll
COT-KSPS25-BSH	COT-KSM25-BSH	COT-KSPS25S-304 / 316	COT-KSM25S-304 / 316	1"	25mm	29.4mm	30M/Roll
COT-KSPS32-BSH	COT-KSM32-BSH	COT-KSPS32S-304 / 316	COT-KSM32S-304 / 316	1 1/4"	32mm	36.5mm	15M/Roll
COT-KSPS38-BSH	COT-KSM38-BSH	COT-KSPS38S-304 / 316	COT-KSM38S-304 / 316	1 1/2"	38mm	44.3mm	15M/Roll
COT-KSPS50-BSH	COT-KSM50-BSH	COT-KSPS50S-304 / 316	COT-KSM50S-304 / 316	2"	50mm	58.0mm	15M/Roll

Remark:

Some of stainless steel model available by order.



Steel Flexible Conduit and with P.V.C. Sheath Flexible Conduit Stainless Steel Flexible Conduit and with P.V.C. Sheath Flexible Conduit



KSM-BSH Series

Material:
Pre Hot-Dipped Galv. (Hot-Dipped Galv. Steel Tape)
-Highly Flexible
-Tensile Resistance



Square-locked Structure
made by helically coiling
formed of steel strip



KSPS-BSH P.V.C. Sheath Series

Material:
Pre Hot-Dipped Galv. (Hot-Dipped Galv. Steel Tape)
-Highly Flexible
-Tensile Resistance
-Water Resistance



Square-locked Structure
made by helically coiling
formed of steel strip
and P.V.C. coated



Stainless Steel Series

Material:
Stainless Steel 304 / 316
-Highly Flexible
-Tensile Resistance



Square-locked Structure
made by helically coiling
formed of stainless steel strip



Stainless Steel P.V.C. Sheath Series

Material:
Stainless Steel 304 / 316
-Highly Flexible
-Tensile Resistance
-Water Resistance



Square-locked Structure
made by helically coiling
formed of stainless steel strip
and P.V.C. coated



Flexible Conduit Pre Hot-Dipped Galv. (Hot-Dipped Galv. Steel Tape)/ P.V.C. Sheath/Stainless Steel

3/8" inner dia. (10mm)	1/2" inner dia. (12mm)
5/8" inner dia. (16mm)	3/4" inner dia. (20mm)
1" inner dia. (25mm)	1 1/4" inner dia. (32mm)
1 1/2" inner dia. (38mm)	2" inner dia. (50mm)
3" inner dia.	4" inner dia.

3/8", 1/2", 3", 4" size available by order




Brand

PVC Sheath Flexible Conduits are manufactured to IEC 61386-23, BS 731, BS EN 50086-2-3, BS EN 60529 IP 54
Metal Flexible Conduits are manufactured to IEC 61386-23, BS 731
Two Part Adaptors are manufactured to IEC 61386-23, BS 731, BS EN 60529 IP 54 and Brass to BS 2874



Liquid Tight Flexible Conduit IP67 and Adaptors

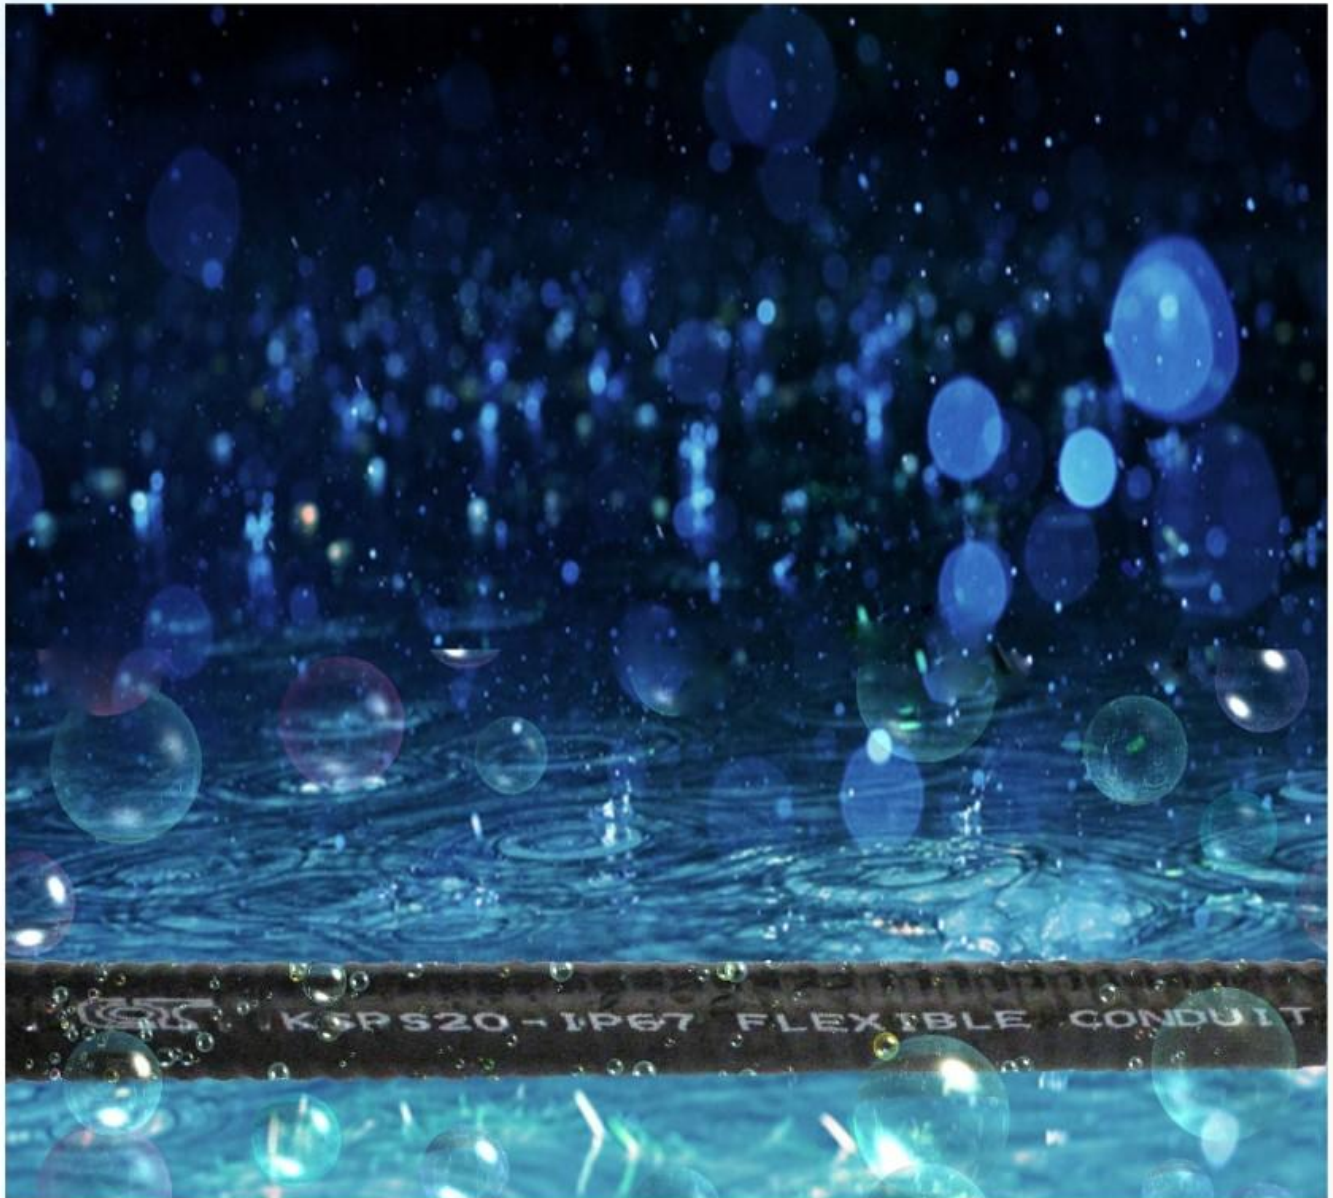

Item Code	Metal Tube (Bore) (approx.)			Std. Packing	WP Type Adaptor*		Thread	WRHD Type Adaptor*	
	Inner Dia.	Outer Dia.	Male		Female	Male		Female	
COT-KSPS20-IP67	3/4"	20mm	26.5mm	30M/Roll	COT-BA20M-WP	COT-BA20F-WP	20mm	COT-BA20M-WRHD	COT-BA20F-WRHD
COT-KSPS25-IP67	1"	25mm	33.0mm	30M/Roll	COT-BA25M-WP	COT-BA25F-WP	25mm	COT-BA25M-WRHD	COT-BA25F-WRHD
COT-KSPS32-IP67	1 1/4"	32mm	40.0mm	15M/Roll	COT-BA32M-WP	COT-BA32F-WP	32mm	COT-BA32M-WRHD	COT-BA32F-WRHD

Remark:

* All Adaptors are made of Brass with Nickel Plated.
Other sizes available by order.



Liquid Tight Flexible Conduit IP67 and Adaptors



KSPS-IP67 Series

Material:
Pre Hot-Dipped Galv. (Hot-Dipped Galv. Steel Tape)
-IP67 Rating
-Highly Flexible
-Tensile Resistance
-Water Resistance

Item No.

Inner dia.

COT-KSPS20-IP67	3/4" (20mm)
COT-KSPS25-IP67	1" (25mm)
COT-KSPS32-IP67	1 1/4" (32mm)

* Other sizes available by order



Square-locked structure

made by helically coiling formed of steel strip and IP67 Rating

WP Type Adaptor



Steps to assemble the **WP type Adaptor** to the IP67 Flexible Conduit:

1. Put the Locking Ring (with insulation rubber ring inside) through the IP67 Flexible Conduit at one end.
2. Put the Inner Screw into the end of IP67 Flexible Conduit.
3. Put the Adaptor Body to the IP67 Flexible Conduit fixed with Inner Screw.
4. Screw both the Locking Ring and Adaptor Body together tightly with two spanners.

WRHD Type Adaptor



Steps to assemble the **WRHD type Adaptor** to the IP67 Flexible Conduit:

1. Put the Locking Ring (with bigger insulation rubber ring inside) through the IP67 Flexible Conduit at one end.
2. Put the Inner Screw into the end of IP67 Flexible Conduit.
3. Put the Adaptor Body (with smaller insulation rubber ring inside) to the IP67 Flexible Conduit fixed with Inner Screw.
4. Screw both the Locking Ring and Adaptor Body together tightly with two spanners.

Remark:

* **WP & WRHD IP 67** Adaptors are made of Brass with Nickel Plated.

* Option:

1. Locknut for male adaptor.
2. Male Bush (Short) for WP type adaptor.
3. Male Bush (Long or Short) for WRHD type adaptor.

Liquid Tight Flexible Conduits IP67 are manufactured to IEC 61386-23, BS 731 and EN 60529:1991+A1:2000 IP 67.



Electrical Conduit Fittings and Accessories



Item Code	Description
COT-CS20/25M1	20 / 25mm Circular Solid Dies with Stock & Guides (Plastic Box)
COT-CS20/25M2	20 / 25mm Circular Solid Dies with Stock & Guides (Paper Box)
COT-CS20/25S1	20mm Solid Dies (for CS20/25 sets use)
COT-CS20/25S2	25mm Solid Dies (for CS20/25 sets use)
COT-CS20/25S3	20mm Guides (for CS20/25 sets use)
COT-CS20/25S4	25mm Guides (for CS20/25 sets use)
COT-CS25/32M1	25 / 32mm Circular Solid Dies with Stock & Guides (Plastic Box)
COT-CS25/32M2	25 / 32mm Circular Solid Dies with Stock & Guides (Paper Box)
COT-CS20/32M6	20 / 25 / 32mm Circular Solid Dies with Stock & Guides (Paper Box)
COT-CS25/32S1	25mm Solid Dies (for CS20/25 sets use)
COT-CS25/32S2	32mm Solid Dies (for CS20/25 sets use)
COT-CS25/32S3	25mm Guides (for CS20/25 sets use)
COT-CS25/32S4	32mm Guides (for CS20/25 sets use)
COT-CS25/32S6	20mm Solid Dies (for CS20/32 sets use)
COT-CS25/32S7	20mm Guides (for CS20/32 sets use)
COT-CS19/26M1	3/4" / 1" Circular Solid Dies with Stock & Guides (Plastic Box)
COT-CS19/26M2	3/4" / 1" Circular Solid Dies with Stock & Guides (Paper Box)
COT-CS19/26S1	3/4" Solid Dies (for CS19/26 sets use)
COT-CS19/26S2	1" Solid Dies (for CS19/26 sets use)
COT-CS19/26S3	3/4" Guides (for CS19/26 sets use)
COT-CS19/26S4	1" Guides (for CS19/26 sets use)
COT-CS38/50M2	1 1/2" / 2" Circular Solid Dies with Stock & Guides (Paper Box)
COT-CS31/50M6	1 1/4" / 1 1/2" / 2" Circular Solid Dies with Stock & Guides (Paper Box)
COT-CS38/50S1	1 1/2" Solid Dies (for CS20/25 sets use)
COT-CS38/50S2	2" Solid Dies (for CS20/25 sets use)
COT-CS38/50S3	1 1/2" Guides (for CS20/25 sets use)
COT-CS38/50S4	2" Guides (for CS20/25 sets use)
COT-CS38/50S6	1 1/4" Solid Dies (for CS20/32 sets use)
COT-CS38/50S7	1 1/4" Guides (for CS20/32 sets use)

* All Spare Parts are Available for Sale Separately

** Option: 200mm Long Handle (for 20 / 25mm & 3/4" / 1" Circular Solid Dies use)


*** Standard Packing: Coloured Carton Box (Option: Plastic Box)



Conduit Bender




Spare Parts of Conduit Bender

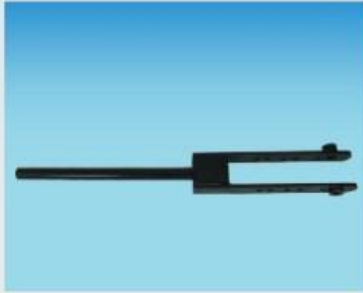

COT-BEND-S01
Bending Lever



COT-BENDING-S02
Extension Tube

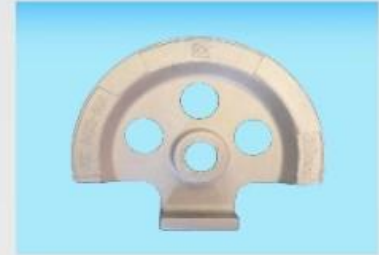

COT-BEND-S03
Former 20mm



COT-BEND-S04
Former 25mm



COT-BEND-S05
Former 32mm



COT-BEND-S06
Groover Roller



COT-BEND-S07
Groover Roller Pin
with Chain & Fix Pin



COT-BEND-S08
Centre Pin



COT-BEND-S09
Stop Bar



COT-BEND-S10
Tube Stop



COT-BEND-S11
Stop Bar Bolt
(LEP Bolt, Washers,
Spacers, Hex-Nut)



COT-BEND-S12
Terry Retaining Pin



COT-BEND-S13
Spare Former Holder



COT-BEND-S14
Fix Pin and Chain



COT-BEND-S15
Hinged Pipe Vice
(16 - 32mm)



COT-BEND-S16
Main Body

Working Instructions

for Conduit Bender

The machine is highly fitted for 20mm, 25mm & 32mm steel conduits and designed only for bending steel conduits but not for other materials.

Setting up Procedures

Unpack the carton. You should find the formers supplied corresponding with those marked on the box and a grooved roller for bending steel conduits.

Take the leg retaining pin out, then open the stand to its widest apart. Re-insert the pin to lock the leg in position.

Lock the pipe vice in position.

Remove the bending lever retaining pin, fit and pin the grooved roller in the appropriate position of the bending lever.

Select the appropriate size of former, remove the centre pin, insert the former and put the centre pin back to its original position.

Raise the bending lever to the upright position and lock it by re-inserting the retaining pin in the lower of the two holes.

Swing the stop bar to the upright position and insert the tube stop into the appropriate hole. Then the machine is now ready for bending.

Bending Steel Conduits

Place the tube into the groove between the stop and the former.

Take the bending lever retaining pin out and pull the bending lever down till the bend is completed.

Safety notes

The machine should be placed on a flat surface. The better is to anchor it onto the floor. Sometimes, the type of bend or the force applied may tend to cause the machine lifted; if this happens, you or an assistant should steady it.

Spare parts of the bender are also available upon order, including Bending lever, Extension Tube, Formers (20mm, 25mm & 32mm), Groover Roller, Groover Roller Pin with Chain & Fix Pin, Centre Pin, Stop Bar, Tube Stop, Stop Bar Bolt (lep bolt, washers, spacers, Hex-nut), Terry Retaining Pin, Spare Former Holder, Fix Pin and Chain, Hinged Pipe Vice (16-32mm) and Main Body.

If you have any further inquiry, please feel free to contact our Sales Department at manyfolk@manyfolk.com or +852 2381 4219.

If you want to use it together with hand operational tapping tool, please contact us for further details.



MANY FOLK ENTERPRISES LIMITED

ADDRESS: FLAT F, 13/F, GOLDEN PLAZA,
745-747 NATHAN ROAD, KOWLOON, HONG KONG
TEL: (852) 2381 4219 (852) 2418 2030 (SALES DEPT.)
FAX: (852) 2397 0861 (852) 2422 9318 (SALES DEPT.)
WEBSITE: www.manyfolk.com
E-MAIL: manyfolk@manyfolk.com



Conduit Bender

FOR ANY QUERY, PLEASE DO NOT HESITATE TO CONTACT US.
如有任何查詢，請聯絡我們。

萬耀豐企業有限公司

地址：香港九龍彌敦道745-747號金都中心十三字樓F室
電話：(852) 2381 4219 (852) 2418 2030 (銷售部)
傳真：(852) 2397 0861 (852) 2422 9318 (銷售部)
網址： www.manyfolk.com
電子郵件： manyfolk@manyfolk.com